

# Product Recall

## Important Notice

Effective Date: 05/17/22

The following product(s) have been issued a recall notification

- **FA-NM-ST Maretron Mini Field Attachable Connector (Male)**



Reason: Label on the connectors were switched by label printing error. This causes customer installation of the power port to communication port which leads to communication and power failure.

Defect Lots/Serial #s: Various

Corrective Action: Please validate the labeling of your connector matches the correct pinout below. If your connector does not match the following setup, please request an RMA by contacting our support team or via our RMA portal.

Tel: (866) 550-9100

Email: [CT\\_CarlingTechMarineSupport@Littelfuse.com](mailto:CT_CarlingTechMarineSupport@Littelfuse.com)

RMA: [https://www.maretron.com/rma\\_request\\_1.php](https://www.maretron.com/rma_request_1.php)


Carling Technologies Reference: QAF-136\_05/17/2022, SCAR-0404-22

### Maretron®

[www.maretron.com](http://www.maretron.com)

**FA-NM-ST**

**Mini Field Attachable Connector  
(Male)**

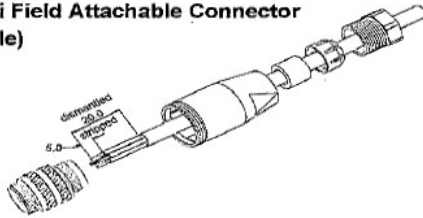

- 1: SHIELD (DRAIN)
- 2: NET-S (+ VOLTAGE)
- 3: NET-C (- VOLTAGE)
- 4: NET-H (CAN\_H)
- 5: NET-L (CAN\_L)

#### INSTALLATION INSTRUCTIONS

- 1) Follow the diagram and slide everything onto the cable except the connector.
- 2) Strip and prepare the wires as shown in the diagram
- 3) Connect the bare or shield wire first before the un-insulated stranded wire becomes separated.
- 4) Leave the center blue wire for last.
- 5) Slide the strain relief parts back towards the connector and secure with the threaded part.

Contact arrangement male connector  
Face view



1 EACH

8 73804 00228 6

IEC 51182-3

Made in USA

3609U



**Carling Technologies®**  
/// NOW PART OF



**Littelfuse®**